

SPECIFICATIONS ON 8" IPS HMW HDPE 4710 PIPE

PRESSURE DROP VS. FLOWRATE

PIPE MANUFACTURING STANDARDS

- ASTM D3035
- ASTM F714
- ASTM F2619
- NSF/ ANSI 14


PIPE RESIN STANDARDS

- ASTM D3350

WATER WORKS STANDARDS

- AWWA C901
- AWWA C906
- NSF/ ANSI 61

PRESSURE DROP VS FLOWRATE FOR 8" HDPE PIPE

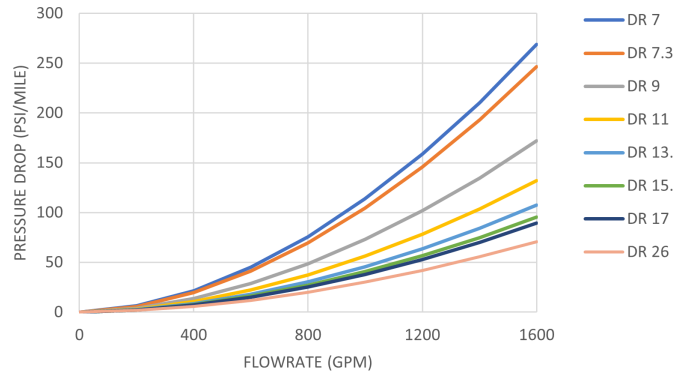









Temperature Deratings

Temperature	Multiplier, F _T
40	1.22
50	1.15
60	1.08
70	1.02
73	1.00
80	0.96
90	0.90
100	0.84
110	0.78
120	0.73
130	0.68
140	0.63

Avg OD, in	DR	7	7.3	9	11	13.5	15.5	17	26
	Pressure Rating	335 psi	317 psi	250 psi	200 psi	160 psi	138 psi	125 psi	80 psi
	Min Wall, in	1.232	1.182	0.958	0.784	0.639	0.556	0.507	0.332
8.625	Avg ID, in	6.013	6.120	6.593	6.963	7.271	7.445	7.549	7.922
	Weight, ft/lb	12.493	12.067	10.102	8.466	7.034	6.194	5.684	3.802

HYDRAULIC PERFORMANCE

*Calculations performed using water as the transfer fluid.

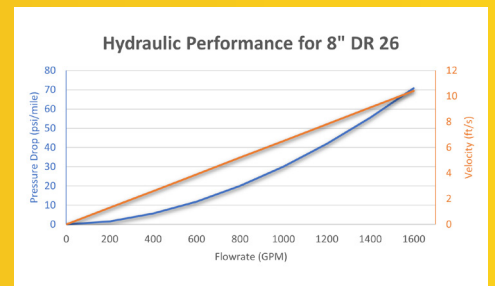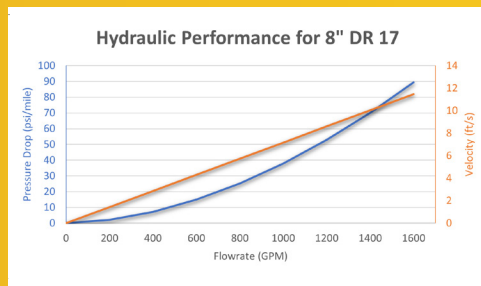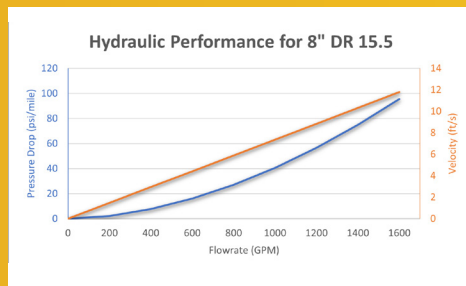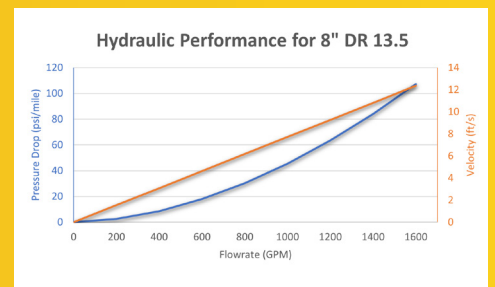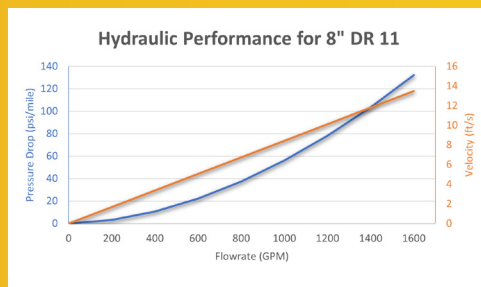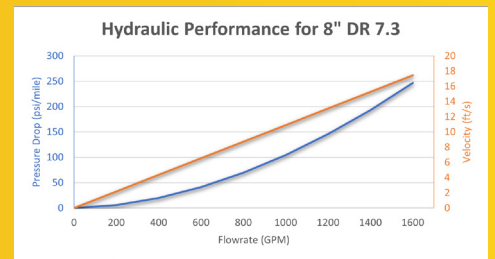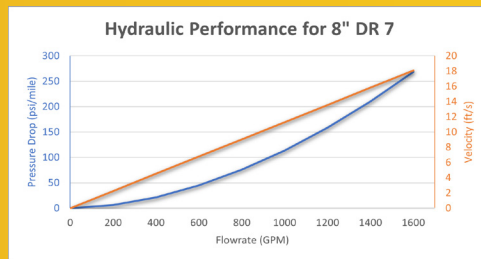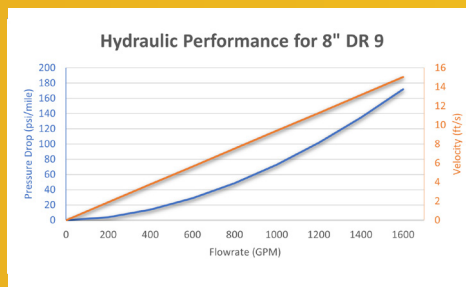

MODERN
POLYMER PIPE & EXTRUSIONS

3005A PASADENA FREEWAY PASADENA, TX 77503 | 713-475-6155 | MODERNPOLYMERPIPE.COM